




AEC3200

USB-C to 2.5G Ethernet Adapter

The AEC3200 is a USB-C to 2.5G Ethernet Adapter, supporting bus-powered, powersaving mode, and Wake-On-LAN functions. This portable design allows you to conveniently carry anywhere, simply connect the adapter to the computer via USB-A port without external power needed. It's also compatible with Windows® and MacOS®.

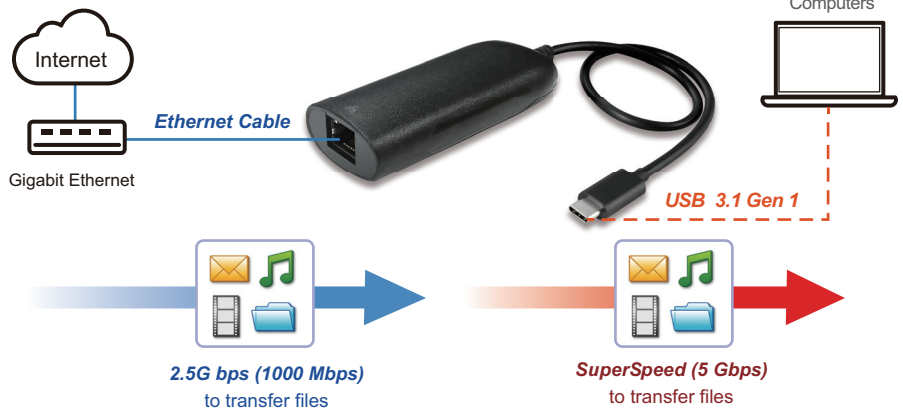

Feature

- USB-C 3.1 Gen 1 upstream tether cable
- 2.5G Ethernet (Supports full-duplex flow control, IEEE802.3)
- Bus-Powered
- Support USB power-saving mode
- Support Wake-On-LAN function
- Support Mac Clone

System Requirement

- Supported Operating System:
 - Windows® 10
 - Mac OS® (10.7 above)
 - Chrome OS (Linux driver required)
 - Linux Kernel 4.1 and above (Linux-ready)

Specification

Interface	USB-C 3.1 Gen 1 port
Ethernet	100M/1G/2.5G bps
System requirement	Intel Core i7 above or an equivalent CPU
Power supply	Bus-powered
Cable Length	30cm
Operation Temperature	0° to 40° degree
Storage Temperature	-20° to 70° degree
Dimension (L x H x W)	85 x 45 x 25 mm

* Specification is subject to change without notice.