

Thunderbolt 3 Dual DP output adapter

The Thunderbolt 3 Dual DP output adapter lets users easily connect two DP1.2 embedded devices from PCs with Thunderbolt 3 interface. This adapter's output resolution is up to 4096x2160@60Hz. No need to install extra drivers, just plug and play, and start to enjoy your high-end life with this slim and stylish adapter.

Features

- Thunderbolt Input
 - Support Thunderbolt 3
 - Support bus-powered 15W
- Video output
 - DP female connector x2
 - Connect to 2 displays individually: up to 4096x2160@60Hz resolution, each
 - Connect to 1 display simultaneously: up to 5120x2880@60Hz resolution

System Requirements

- PC with Thunderbolt V3 interface
 - Supported Operating System
 - Windows® 10
 - Mac OS

Package Contents

- Thunderbolt 3 Dual DP output adapter


Specifications

User Interface	Upstream	Thunderbolt 3 male connector
	Downstream	DP female connector x2
Power Supply	Bus-Powered	
Working Environment	Operation Temperature	0~40°C
	Storage Temperature	-20~70°C
	Dimension	93(L) x 56(W) x 16(H)mm
Cable Length	270 mm	
Compliance	CE, FCC	

* Specification is subject to change without notice.



Application

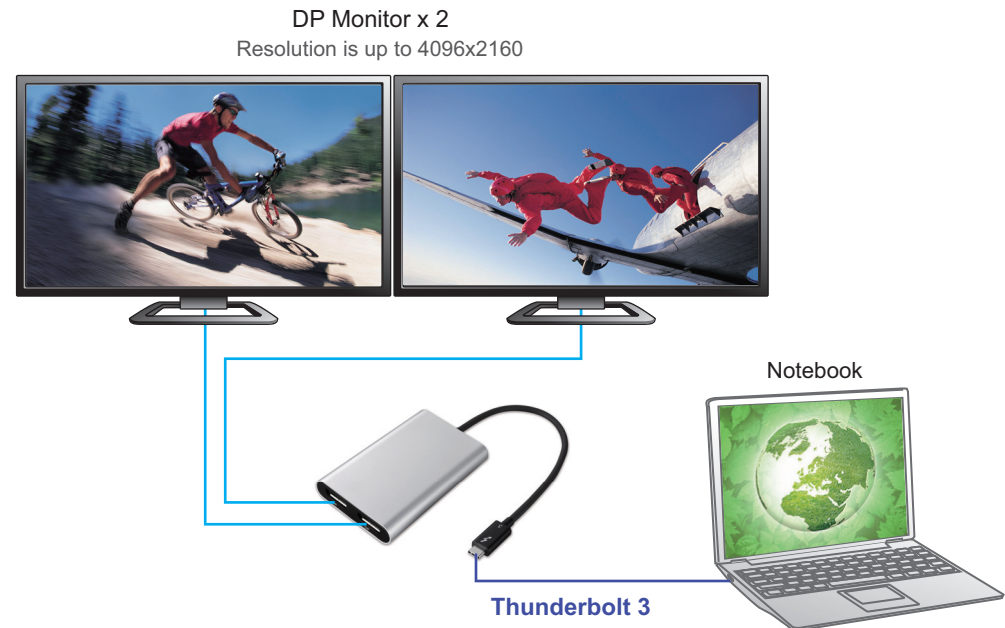

GOOD WAY TECHNOLOGY CO., LTD.

3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan
Tel: 886-2-8919-1200 Fax: 886-2-8919-1220~1